BILL OF MATERIALS	ASSEMBLY POS. 1-C10			No. Required 3		POS. NO. 111	
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	weight (kg) TOTAL	NOTE
111	1	IPE500-J	8954.2	S235JR	88.20	789.76	789.76	
115	1	IPE500-J	3969.0	S235JR	88.20	350.06	350.06	
228	1	PL20*240	540.0	S235JR	20.35	20.35	20.35	
236	1	PL20*220	1419.0	S235JR	49.01	49.01	49.01	
386	1	PL10*98.3	133.5	S235JR	0.76	0.76	0.76	
392	2	PL10*90	468.0	S235JR	3.29	3.29	6.58	
412	1	PL10*131.6	163.6	S235JR	0.87	0.87	0.87	
463	1	PL5*130	197.0	S235JR	1.01	1.01	1.01	
490	2	PL5*75	75.0	S235JR	0.22	0.22	0.43	
491	3	PL5*130	180.0	S235JR	0.92	0.92	2.76	
493	1	PL5*130	250.0	S235JR	1.28	1.28	1.28	
501	3	PL5*100	100.0	S235JR	0.20	0.20	0.59	
Total Weight						1221.9	(kg)	

BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
4	M 24x55	BOLTS	A307	291.0	1.16
4	M 24	NUTS	A307	104.0	0.42
4	M 24	WASHERS	A307	32.0	0.13
Total weight					1.71 (KG)

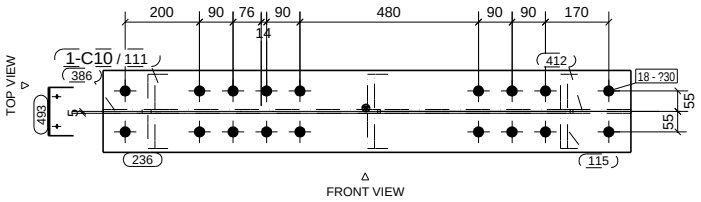

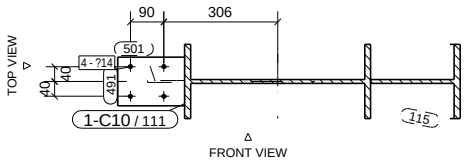

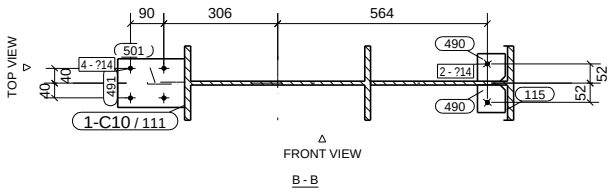

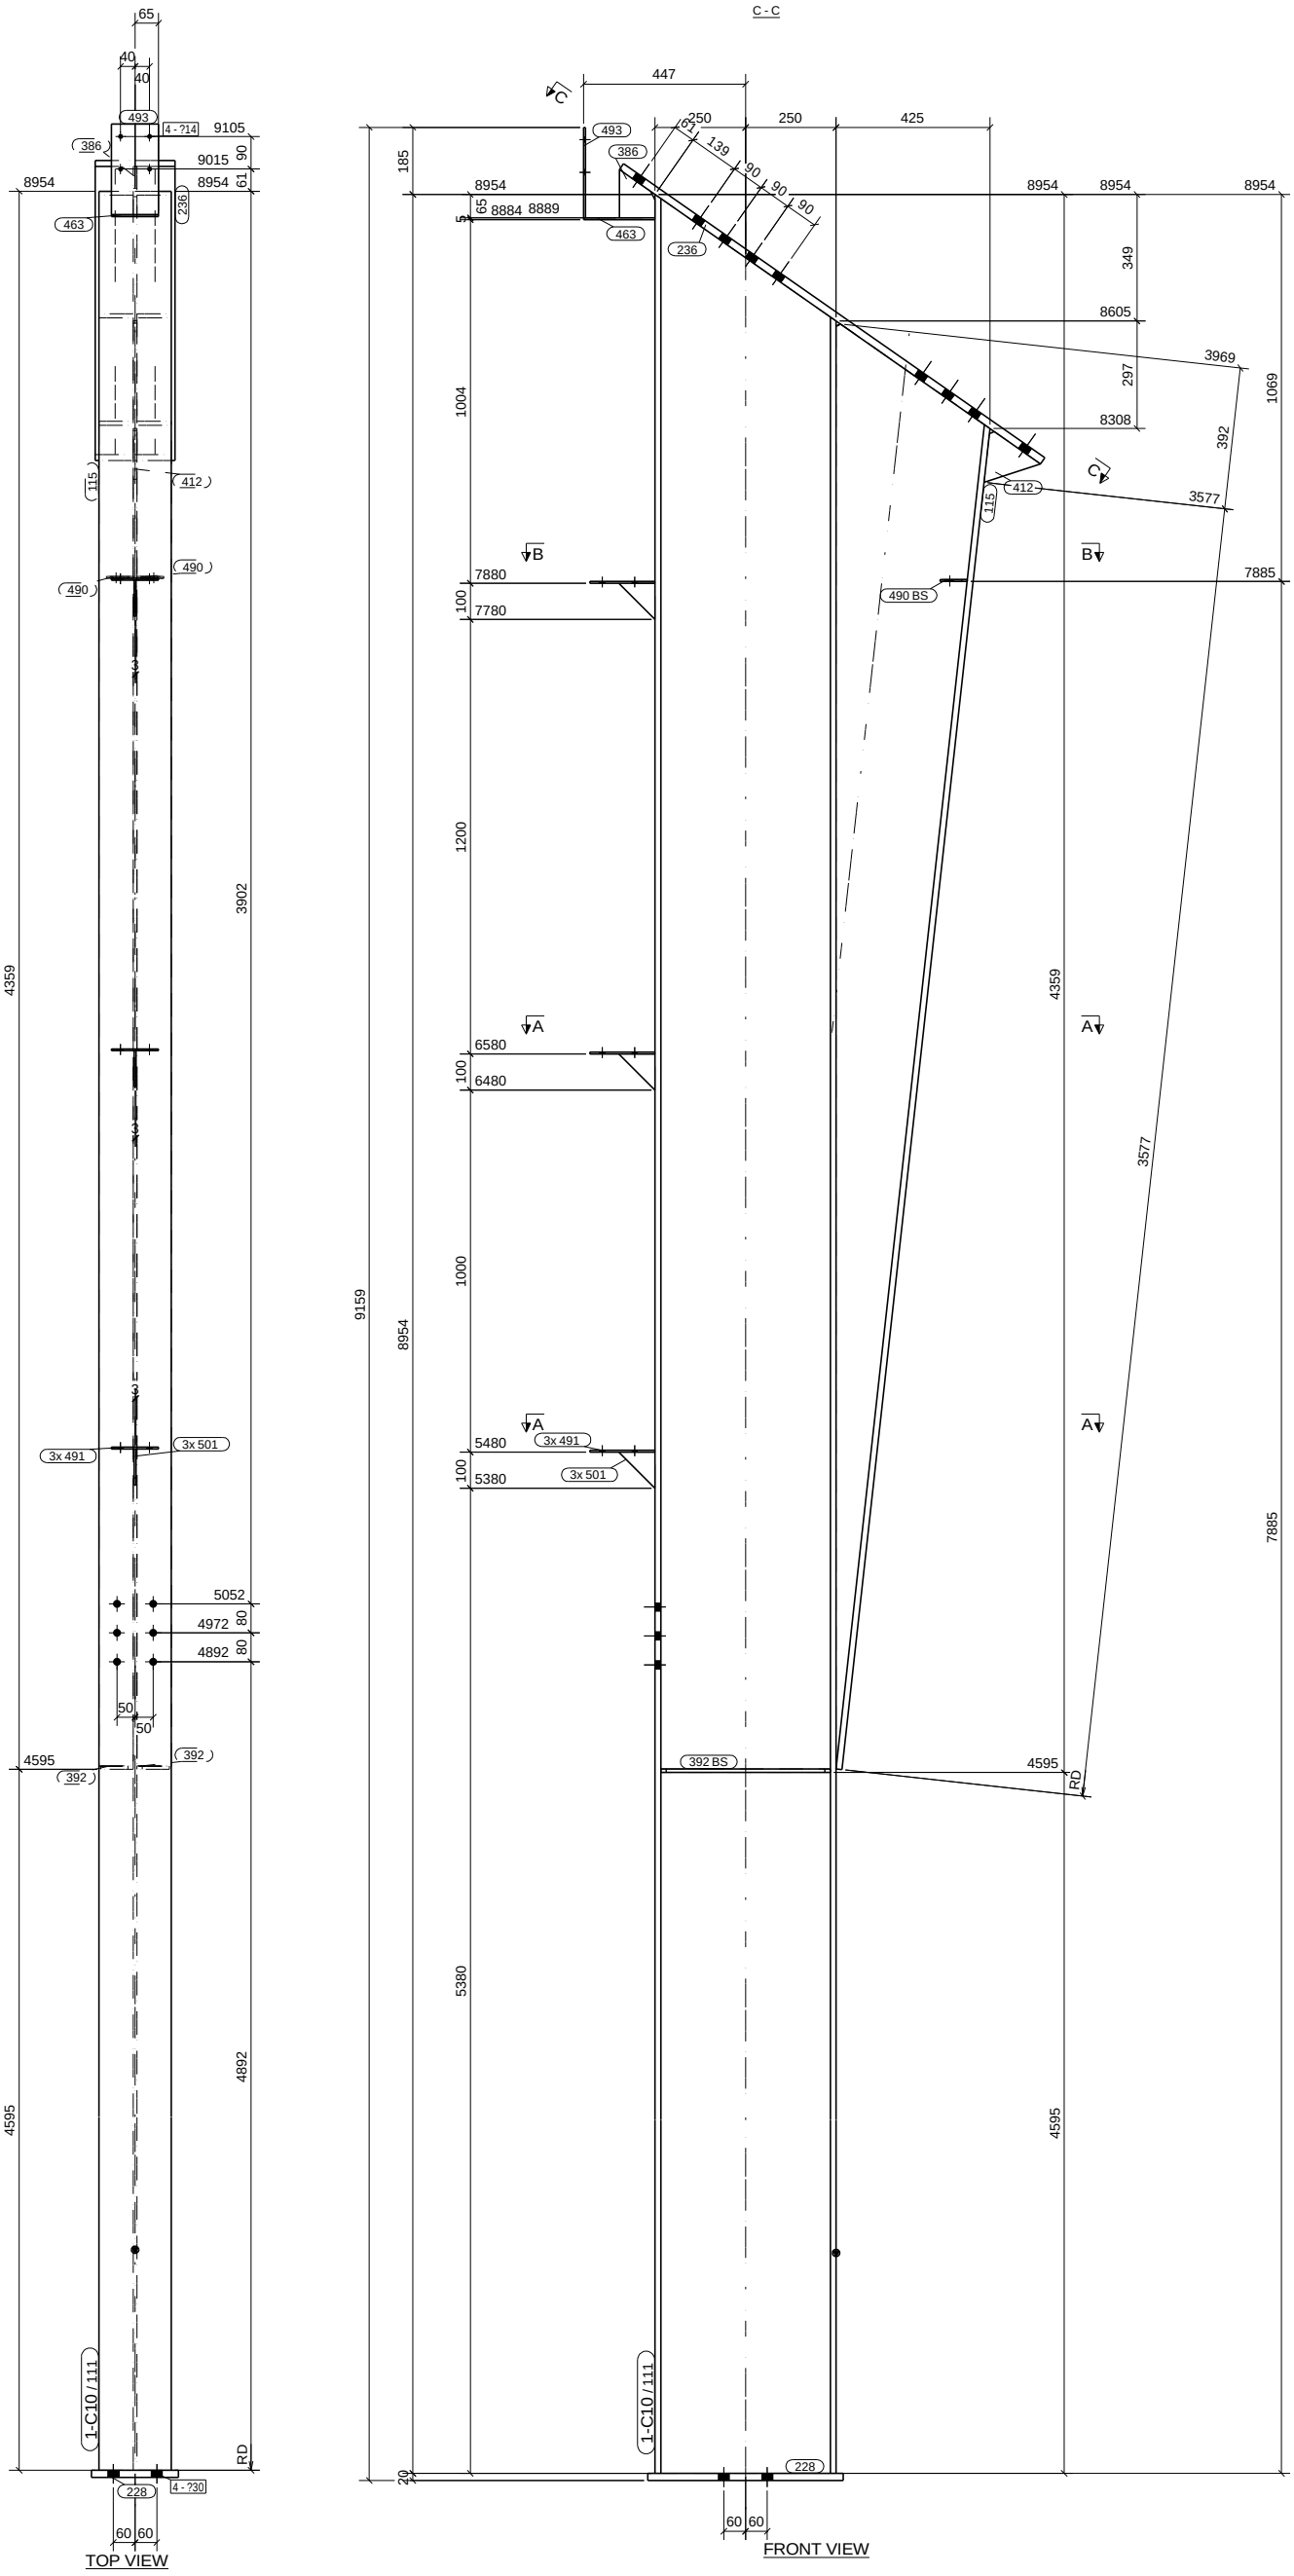

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - -

DRAWING TITLE:

COLUMN
1-C10

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

rekastructures
/12/2026 * 15:26:19
PDF created with pdfFactory Pro trial version www.pdffactory.com