BILL OF MATERIALS		ASSEMBLY POS. 1-PU12			No. Required 401			POS. NO. 283
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	weight (kg) TOTAL	NOTE
283	1	ZZ182-1.8-15-50	8400.0	S235JR	4.31	36.18	36.18	
Total Weight						36.2	(kg)	

BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
4	M12x25	BOLTS	A307	36.6	0.15
4	M12	NUTS	A307	15.9	0.06
4	M12	WASHERS	A307	5.9	0.02
4	M12x25	BOLTS	GR8.8	36.6	0.15
4	M12	NUTS	GR8.8	15.9	0.06
4	M12	WASHERS	GR8.8	5.9	0.02
4	M12x30	BOLTS	GR8.8	40.2	0.16
4	M12	NUTS	GR8.8	15.9	0.06
4	M12	WASHERS	GR8.8	5.9	0.02
Total weight					0.72 (KG)



TOP VIEW

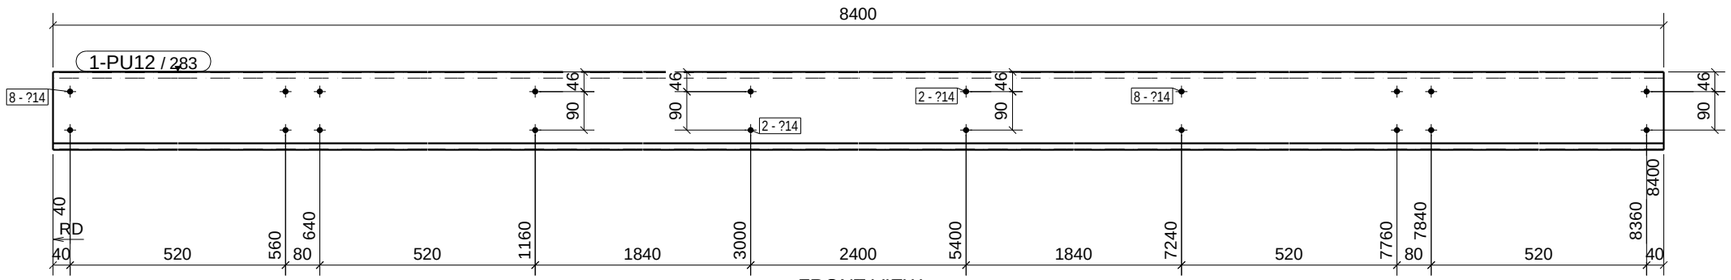

FRONT VIEW

MARK: 1-PU12
QTY: 401
DESC.: ZZ182-1.8-15-50

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

PURLIN
1-PU12

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

Tekla structures
6/12/2026 * 15:27:35

PDF created with pdfFactory Pro trial version www.pdffactory.com