BILL OF MATERIALS		ASSEMBLY POS. 1-R8			No. Required 2		POS. NO. 221	
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	TOTAL	NOTE
221	1	IPE200-J	11598.2	S235JR	20.90	242.40	242.40	
257	2	PL12*130	320.0	S235JR	3.92	3.92	7.84	
263	2	PL6*60	80.0	S235JR	0.15	0.15	0.30	
264	1	PL6*80	58.6	S235JR	0.14	0.14	0.14	
265	1	PL6*59.7	78.4	S235JR	0.14	0.14	0.14	
396	2	PL10*40	181.0	S235JR	0.55	0.55	1.10	
490	6	PL5*75	75.0	S235JR	0.22	0.22	1.30	
491	9	PL5*130	180.0	S235JR	0.92	0.92	8.27	
501	9	PL5*100	100.0	S235JR	0.20	1.77		
Total Weight						263.7	(kg)	

BOLT, NUT & WASHERS MATERIAL LIST				
EACH	REMARK		UNIT WEIGHT KG/1000	WEIGHT (KG)
16	M 16x50 BOLTS	GR8.8	111.1	1.78
16	M 16 NUTS	GR8.8	32.9	0.53
16	M 16 WASHERS	GR8.8	11.0	0.18
Total weight				2.48 (KG)

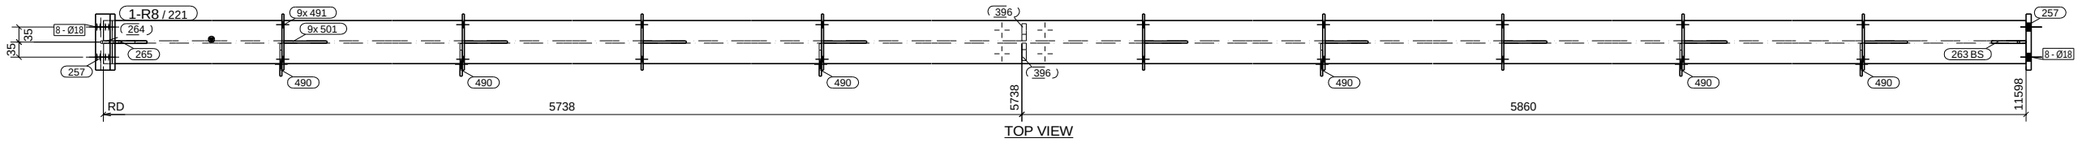

TOP VIEW

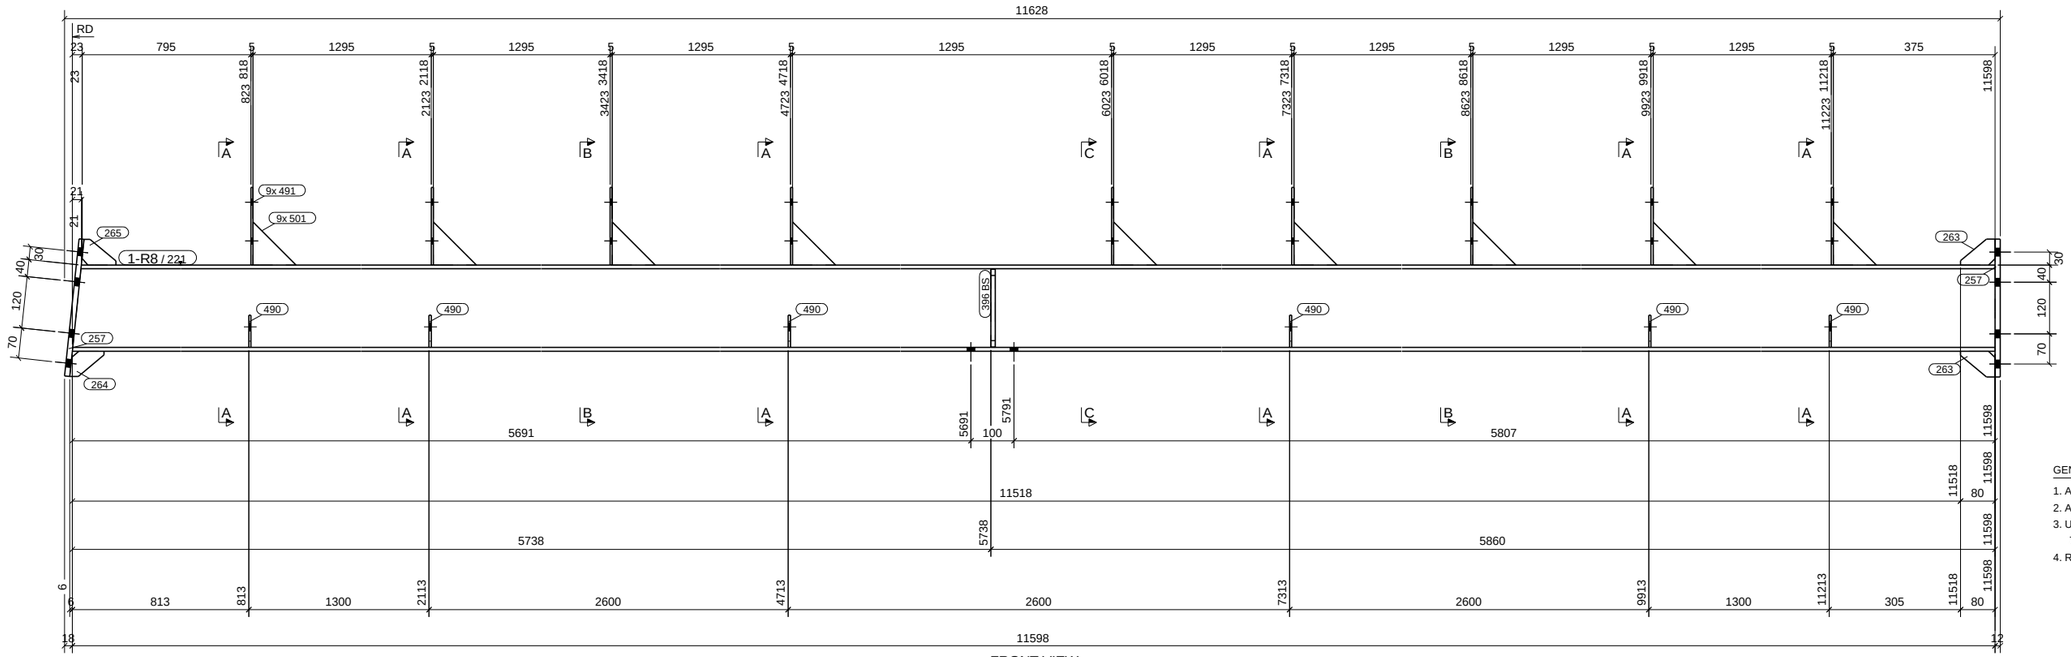

FRONT VIEW

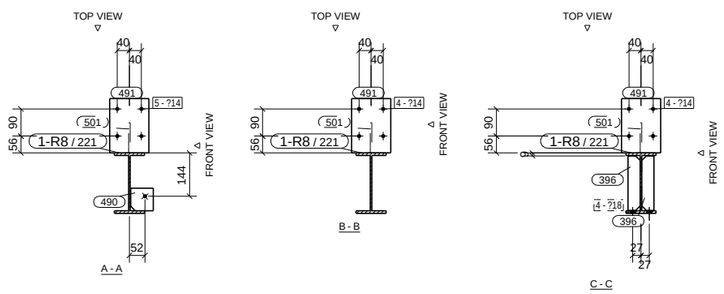

MARK: 1-R8
QTY: 2
DESC.: IPE200-J

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

RAFTER
1-R8

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

/12/2026 * 15:28:21

PDF created with pdfFactory Pro trial version www.pdffactory.com