BILL OF MATERIALS		ASSEMBLY POS. 2-PU31			No. Required 1		POS. NO. 315	
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	TOTAL	NOTE
315	1	ZZ182-1.8-15-50	7697.4	S235JR	4.31	33.15	33.15	
Total Weight						33.2 (kg)		

BOLT, NUT & WASHERS MATERIAL LIST				
EACH	REMARK		UNIT WEIGHT KG/1000	WEIGHT (KG)
4	M12x25 BOLTS	A307	36.6	0.15
4	M12 NUTS	A307	15.9	0.06
4	M12 WASHERS	A307	5.9	0.02
4	M12x25 BOLTS	GR8.8	36.6	0.15
4	M12 NUTS	GR8.8	15.9	0.06
4	M12 WASHERS	GR8.8	5.9	0.02
8	M12x30 BOLTS	GR8.8	40.2	0.32
8	M12 NUTS	GR8.8	15.9	0.13
8	M12 WASHERS	GR8.8	5.9	0.05
Total weight				0.96 (KG)

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

TOP VIEW

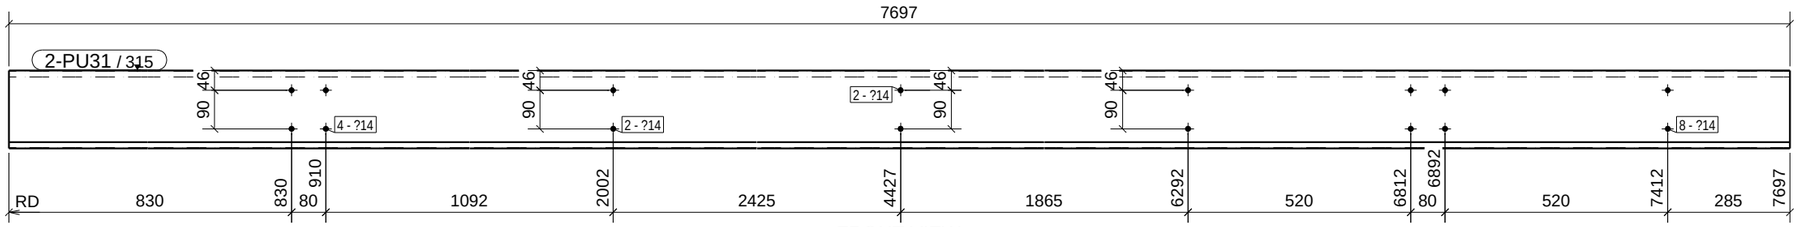

FRONT VIEW

MARK: 2-PU31
QTY: 1
DESC.: ZZ182-1.8-15-50

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

PURLIN
2-PU31

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

Tekla structures
16/12/2026 * 15:32:11

PDF created with pdfFactory Pro trial version www.pdffactory.com