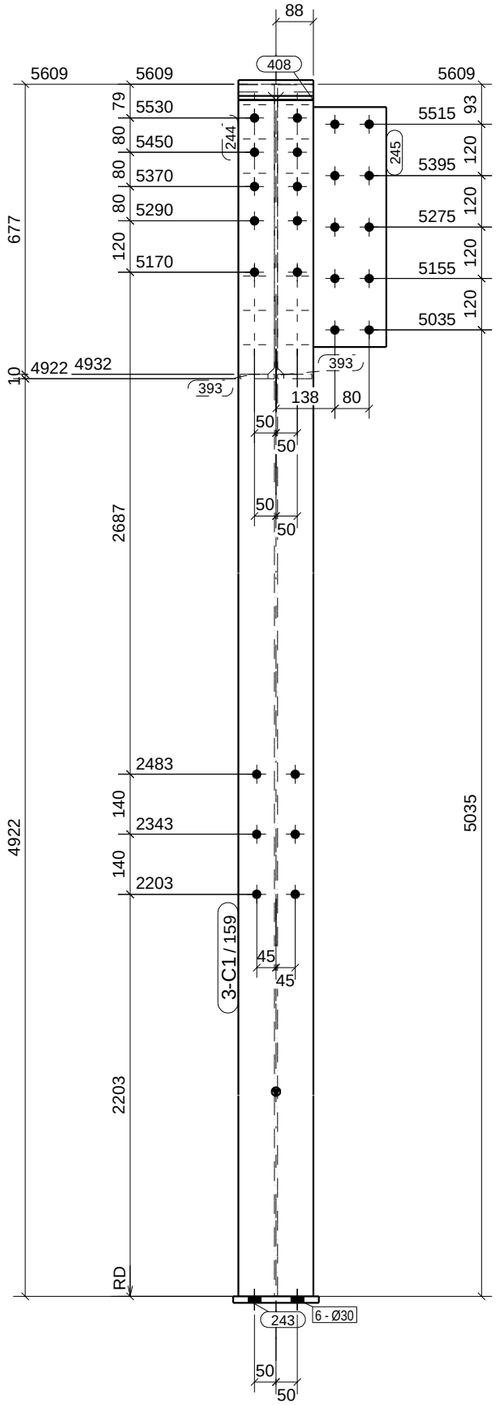

TOP VIEW

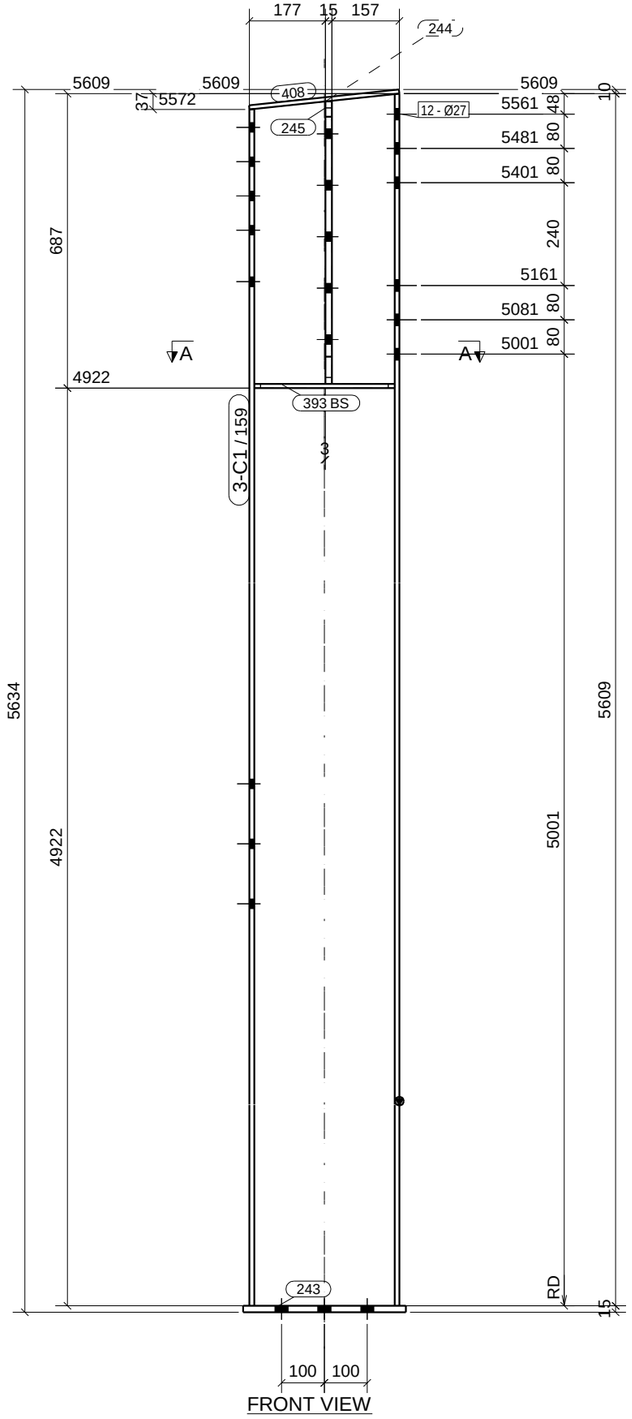

FRONT VIEW



A - A

BILL OF MATERIALS	ASSEMBLY POS. 3-C1				No. Required 1		POS. NO. 159
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	TOTAL	NOTE
159	1	IPE350-J	5608.6	S235JR	49.40	277.07	277.07	
243	1	PL15*200	380.0	S235JR	8.95	8.95	8.95	
244	1	PL15*84	658.8	S235JR	6.49	6.49	6.49	
245	1	PL15*254	658.8	S235JR	17.70	17.70	17.70	
393	2	PL10*80	328.0	S235JR	2.04	2.04	4.08	
408	1	PL10*175	351.9	S235JR	4.83	4.83	4.83	
Total Weight						319.0	(kg)	

BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
6	M24x50	BOLTS	A307	273.0	1.64
6	M24	NUTS	A307	104.0	0.62
6	M24	WASHERS	A307	32.0	0.19
Total weight					2.45 (KG)

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

MARK: 3-C1
QTY: 1
DESC.: IPE350-J

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

COLUMN
3-C1

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

Tekla structures
16/12/2026 * 15:35:11

PDF created with pdfFactory Pro trial version www.pdffactory.com