BILL OF MATERIALS	ASSEMBLY POS. 3-R12			No. Required 2		POS. NO. 435
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY. / TOTAL	NOTE
435	1	IPE300-J	9660.8	S235JR	36.70	354.55 / 354.55	
216	1	PL8*150	92.8	S235JR	0.55	0.55 / 0.55	
218	1	PL8*74.6	148.4	S235JR	0.39	0.39 / 0.39	
246	1	PL15*170	470.0	S235JR	9.41	9.41 / 9.41	
254	1	PL15*180	325.0	S235JR	6.89	6.89 / 6.89	
491	8	PL5*130	180.0	S235JR	0.92	0.92 / 7.35	
501	8	PL5*100	100.0	S235JR	0.20	0.20 / 1.57	
Total Weight						380.9 (kg)	

BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
14	M 20x 60	BOLTS	GR8.8	204.2	2.86
14	M 20	NUTS	GR8.8	59.8	0.84
14	M 20	WASHERS	GR8.8	17.0	0.24
Total weight					3.93 (KG)



TOP VIEW

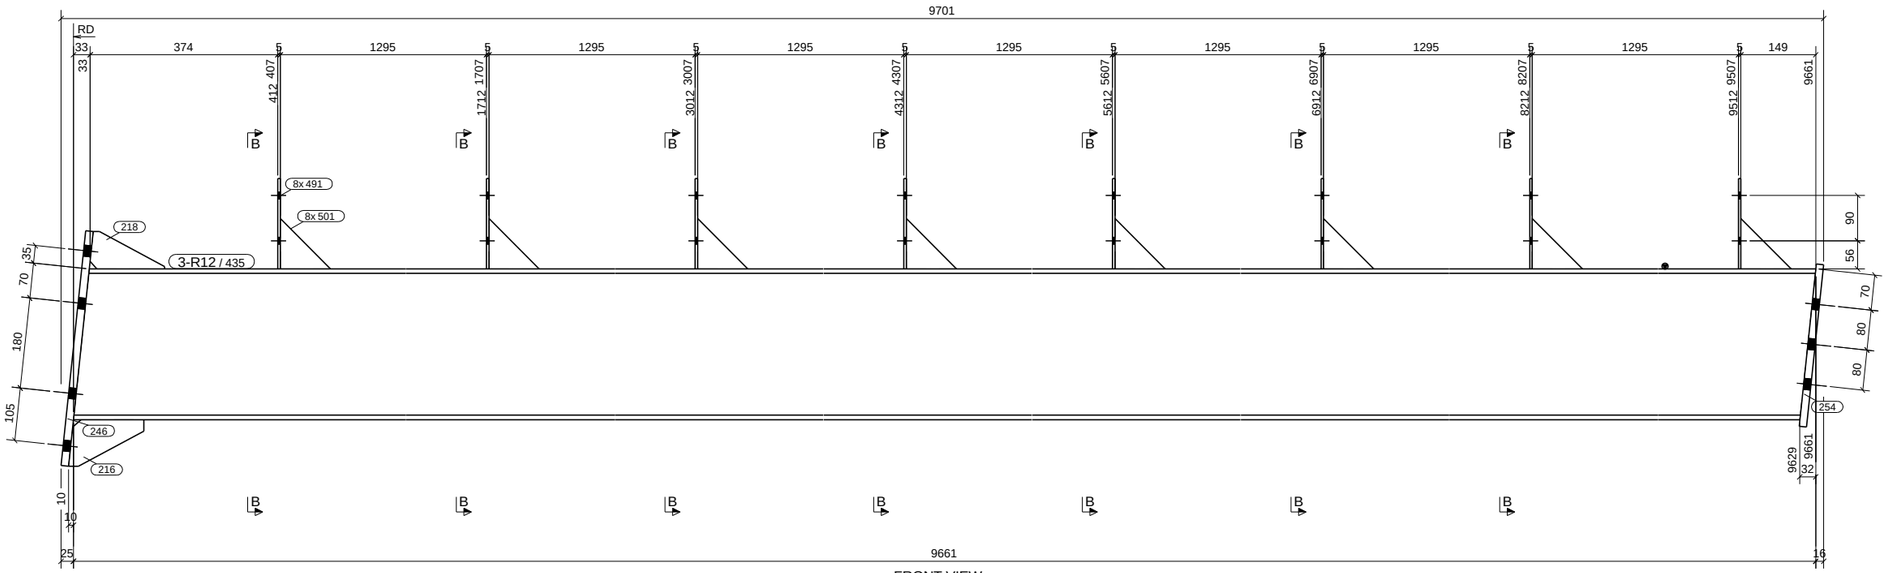

FRONT VIEW



B - B

MARK: 3-R12
QTY: 2
DESC.: IPE300-J

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

RAFTER
3-R12

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

Tekla structures

/12/2026 - 15:35:36

PDF created with pdfFactory Pro trial version www.pdffactory.com