

BILL OF MATERIALS	ASSEMBLY POS. 3-R1			No. Required 4		POS. NO. 149		
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	TOTAL	NOTE
149	1	IPE350-J	5839.7	S235JR	49.40	288.48	288.48	
213	1	PL8*82.7	175.4	S235JR	0.50	0.50	0.50	
215	2	PL8*84	328.0	S235JR	1.72	1.72	3.43	
242	1	PL15*180	470.0	S235JR	9.96	9.96	9.96	
251	2	PL15*200	352.0	S235JR	8.29	8.29	16.58	
491	5	PL5*130	180.0	S235JR	0.92	0.92	4.59	
501	5	PL5*100	100.0	S235JR	0.20	0.20	0.98	
Total Weight						324.4	(kg)	


BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
2	M 24x 50	BOLTS	GR8.8	273.0	0.55
2	M 24	NUTS	GR8.8	104.0	0.21
2	M 24	WASHERS	GR8.8	32.0	0.06
10	M 20x 55	BOLTS	GR8.8	191.2	1.91
10	M 20	NUTS	GR8.8	59.8	0.60
10	M 20	WASHERS	GR8.8	17.0	0.17
Total weight					3.50 (KG)

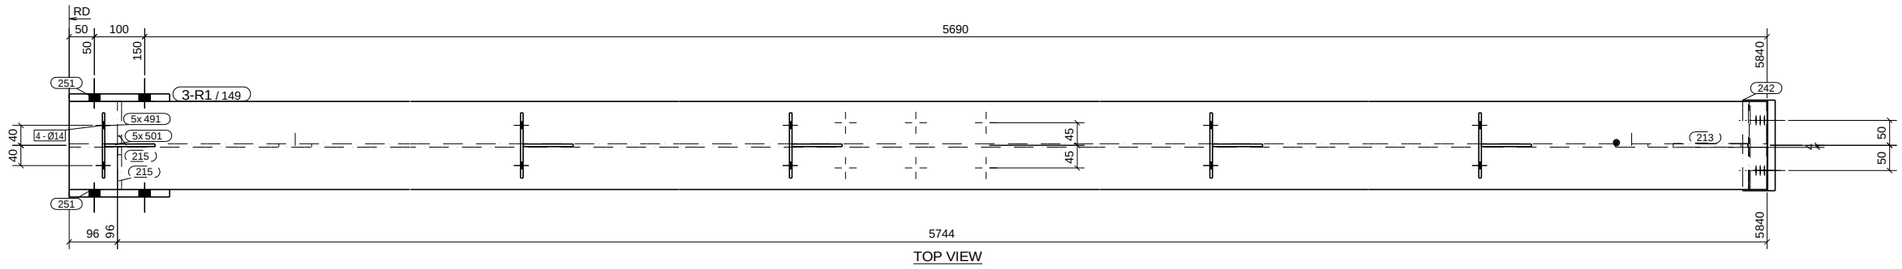

TOP VIEW



A - A

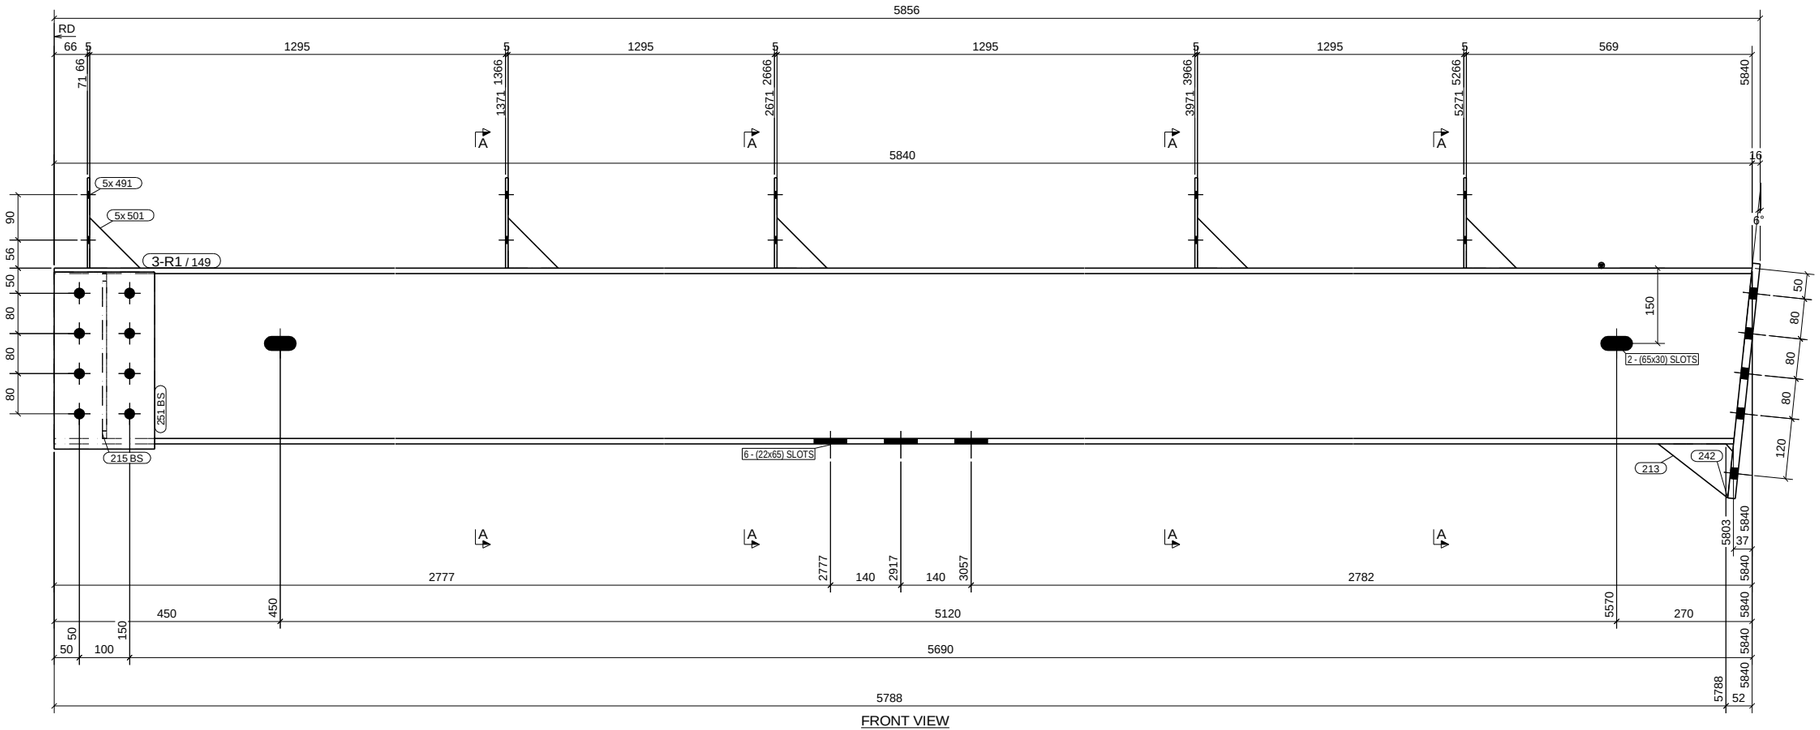

FRONT VIEW

MARK: 3-R1
QTY: 4
DESC.: IPE350-J

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

RAFTER
3-R1

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

rokla structures

12/2026 ٠ 15:35:20

PDF created with pdfFactory Pro trial version www.pdffactory.com