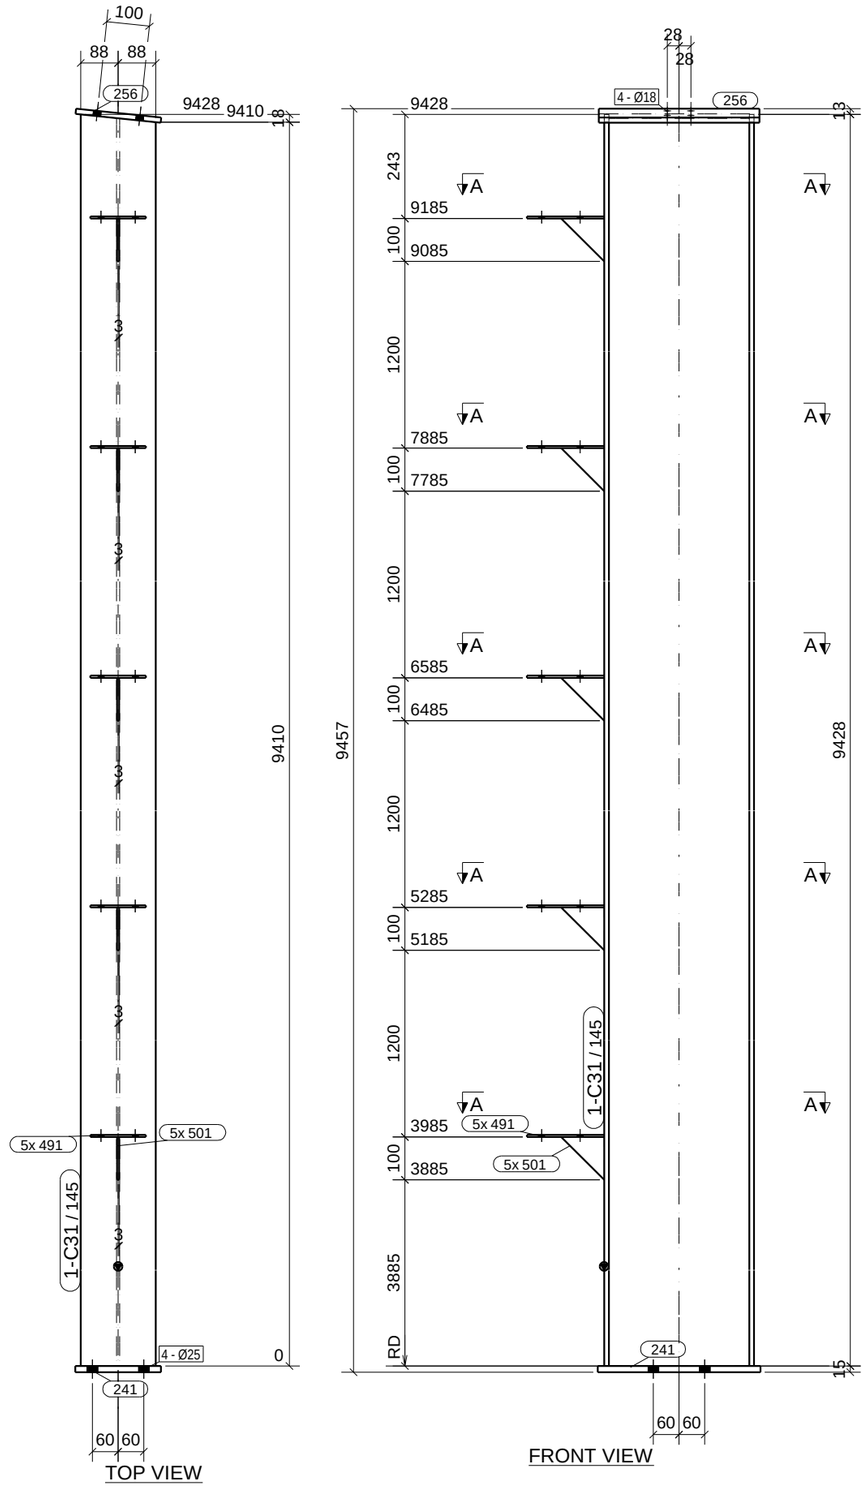

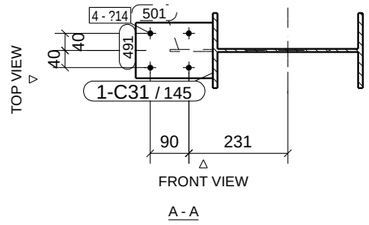

BILL OF MATERIALS	ASSEMBLY POS. 1-C31				No. Required 1		POS. NO. 145	
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	weight (kg) TOTAL	NOTE
145	1	IPE350-J	9428.4	S235JR	49.40	465.76	465.76	
241	1	PL15*200	380.0	S235JR	8.95	8.95	8.95	
256	1	PL12*200	375.0	S235JR	7.06	7.06	7.06	
491	5	PL5*130	180.0	S235JR	0.92	0.92	4.59	
501	5	PL5*100	100.0	S235JR	0.20	0.20	0.98	
Total Weight						487.2	(kg)	

BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
4	M20x45	BOLTS	A307	167.2	0.67
4	M20	NUTS	A307	59.8	0.24
4	M20	WASHERS	A307	17.0	0.07
4	M16x45	BOLTS	GR8.8	104.1	0.42
4	M16	NUTS	GR8.8	32.9	0.13
4	M16	WASHERS	GR8.8	11.0	0.04
Total weight					1.57 (KG)

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

MARK: 1-C31
QTY: 1
DESC.: IPE350-J

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

COLUMN
1-C31

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

Tekla structures
16/12/2026 * 15:27:02

PDF created with pdfFactory Pro trial version www.pdffactory.com