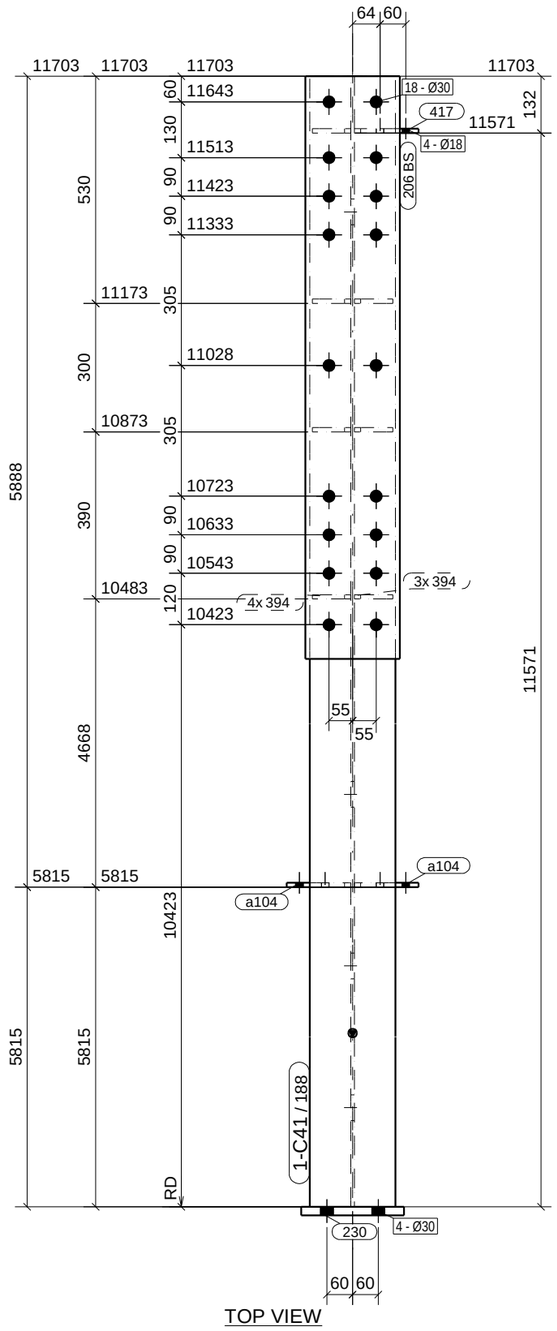

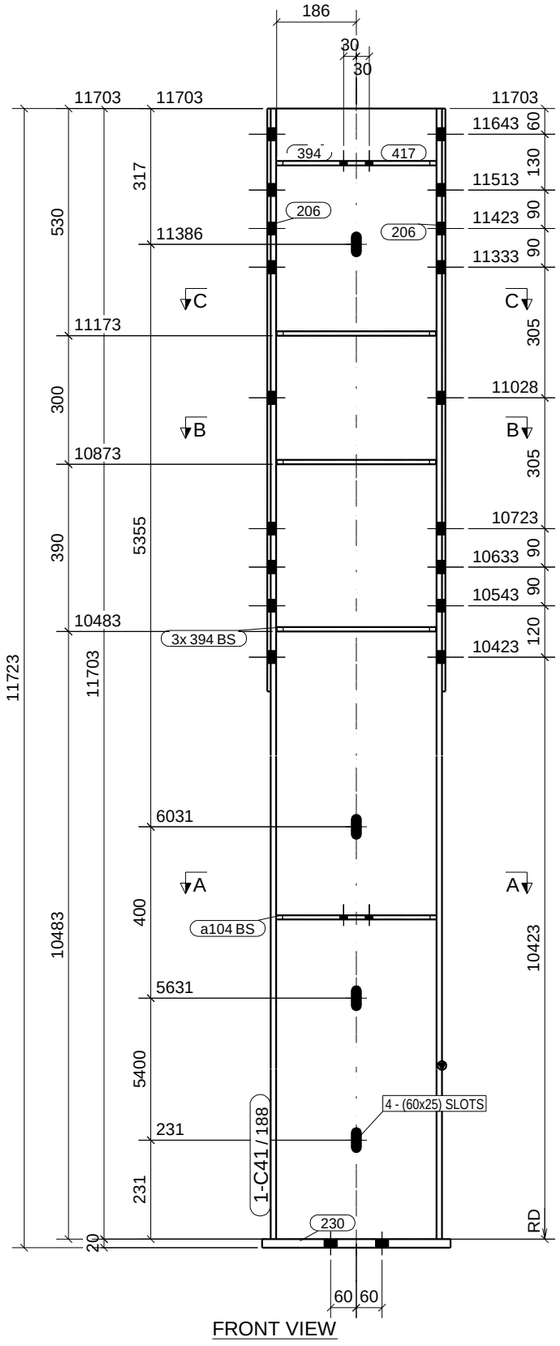



C - C



A - A

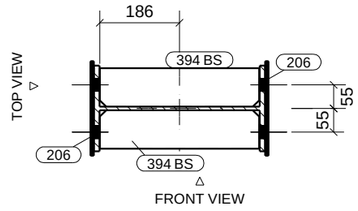

B - B

BILL OF MATERIALS	ASSEMBLY POS. 1-C41				No. Required 4		POS. NO. 188
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	weight (kg) TOTAL	NOTE
188	1	IPE400-J	11703.1	S235JR	65.40	765.38	765.38	
206	2	PL8*220	1360.0	S235JR	18.79	18.79	37.58	
230	1	PL20*240	440.0	S235JR	16.58	16.58	16.58	
394	7	PL10*90	372.0	S235JR	2.61	2.61	18.27	
417	1	PL10*150	374.0	S235JR	4.39	4.39	4.39	
a104	2	PL10*150	374.0	S235JR	4.39	4.39	8.77	
Total Weight						851.5	(kg)	

BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
4	M24x55	BOLTS	A307	291.0	1.16
4	M24	NUTS	A307	104.0	0.42
4	M24	WASHERS	A307	32.0	0.13
4	M20x40	BOLTS	GR8.8	154.2	0.62
4	M20	NUTS	GR8.8	59.8	0.24
4	M20	WASHERS	GR8.8	17.0	0.07
Total weight					2.63 (KG)

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

COLUMN
1-C41

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

MARK: 1-C41
QTY: 4
DESC.: IPE400-J

Tekla structures
16/12/2026 * 15:27:17

PDF created with pdfFactory Pro trial version www.pdffactory.com