BILL OF MATERIALS		ASSEMBLY POS. 1-PU17			No. Required 56			POS. NO. 299
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	weight (kg) TOTAL	NOTE
299	1	ZZ182-1.8-15-50	6950.0	S235JR	4.31	29.93	29.93	
Total Weight						29.9	(kg)	

BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
4	M12x25	BOLTS	GR8.8	36.6	0.15
4	M12	NUTS	GR8.8	15.9	0.06
4	M12	WASHERS	GR8.8	5.9	0.02
4	M12x30	BOLTS	GR8.8	40.2	0.16
4	M12	NUTS	GR8.8	15.9	0.06
4	M12	WASHERS	GR8.8	5.9	0.02
Total weight					0.48 (KG)



TOP VIEW

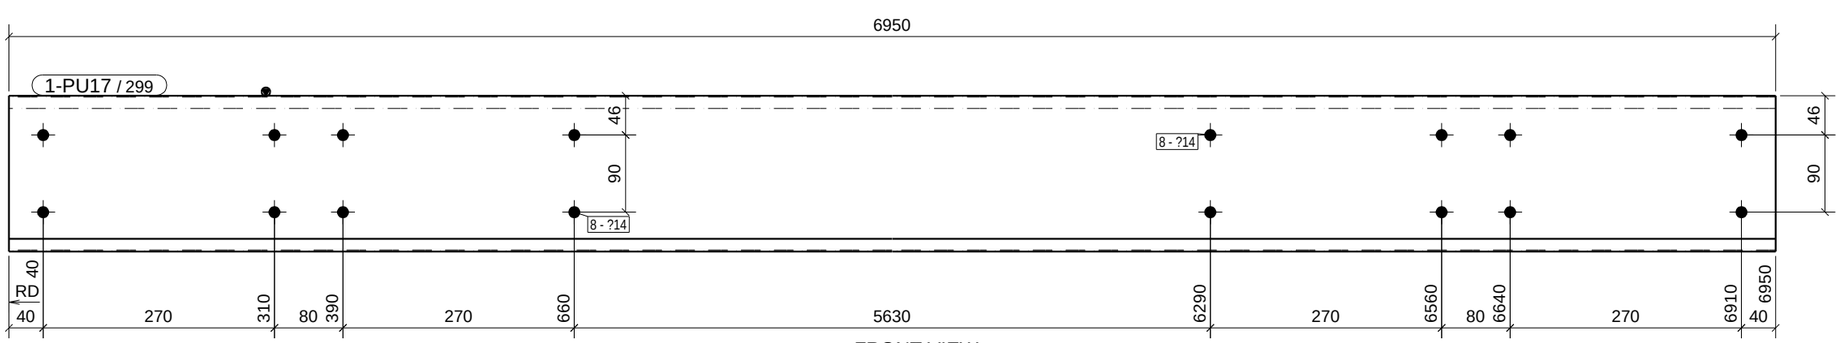

FRONT VIEW

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

MARK: 1-PU17
QTY: 56
DESC.: ZZ182-1.8-15-50

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

PURLIN
1-PU17

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

Tekla structures
06/12/2026 * 15:27:39

PDF created with pdfFactory Pro trial version www.pdffactory.com