


BILL OF MATERIALS	ASSEMBLY POS. 1-C16			No. Required 1		POS. NO. 114		
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	weight (kg) TOTAL	NOTE
114	1	IPE500-J	8954.2	S235JR	88.20	789.76	789.76	
115	1	IPE500-J	3969.0	S235JR	88.20	350.06	350.06	
207	4	PL8*228.8	287.0	S235JR	3.11	3.11	12.43	
228	1	PL20*240	540.0	S235JR	20.35	20.35	20.35	
236	1	PL20*220	1419.0	S235JR	49.01	49.01	49.01	
386	1	PL10*98.3	133.5	S235JR	0.76	0.76	0.76	
392	4	PL10*90	468.0	S235JR	3.29	3.29	13.16	
412	1	PL10*131.6	163.6	S235JR	0.87	0.87	0.87	
416	1	PL10*150	468.0	S235JR	5.49	5.49	5.49	
423	1	IPE300-J	4236.2	S235JR	36.70	155.47	155.47	
463	1	PL5*130	197.0	S235JR	1.01	1.01	1.01	
490	2	PL5*75	75.0	S235JR	0.22	0.22	0.43	
491	3	PL5*130	180.0	S235JR	0.92	0.92	2.76	
493	1	PL5*130	250.0	S235JR	1.28	1.28	1.28	
501	3	PL5*100	100.0	S235JR	0.20	0.20	0.59	
Total Weight						1401.9	(kg)	


BOLT, NUT & WASHERS MATERIAL LIST					
EACH	REMARK			UNIT WEIGHT KG/1000	WEIGHT (KG)
4	M 24x 55	BOLTS	A307	291.0	1.16
4	M 24	NUTS	A307	104.0	0.42
4	M 24	WASHERS	A307	32.0	0.13
2	M 20x 40	BOLTS	GR8.8	154.2	0.31
2	M 20	NUTS	GR8.8	59.8	0.12
2	M 20	WASHERS	GR8.8	17.0	0.03
Total weight					2.17 (KG)

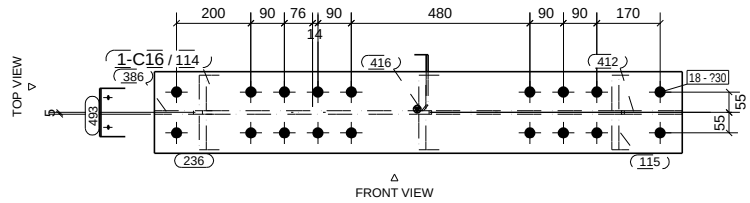


E - E

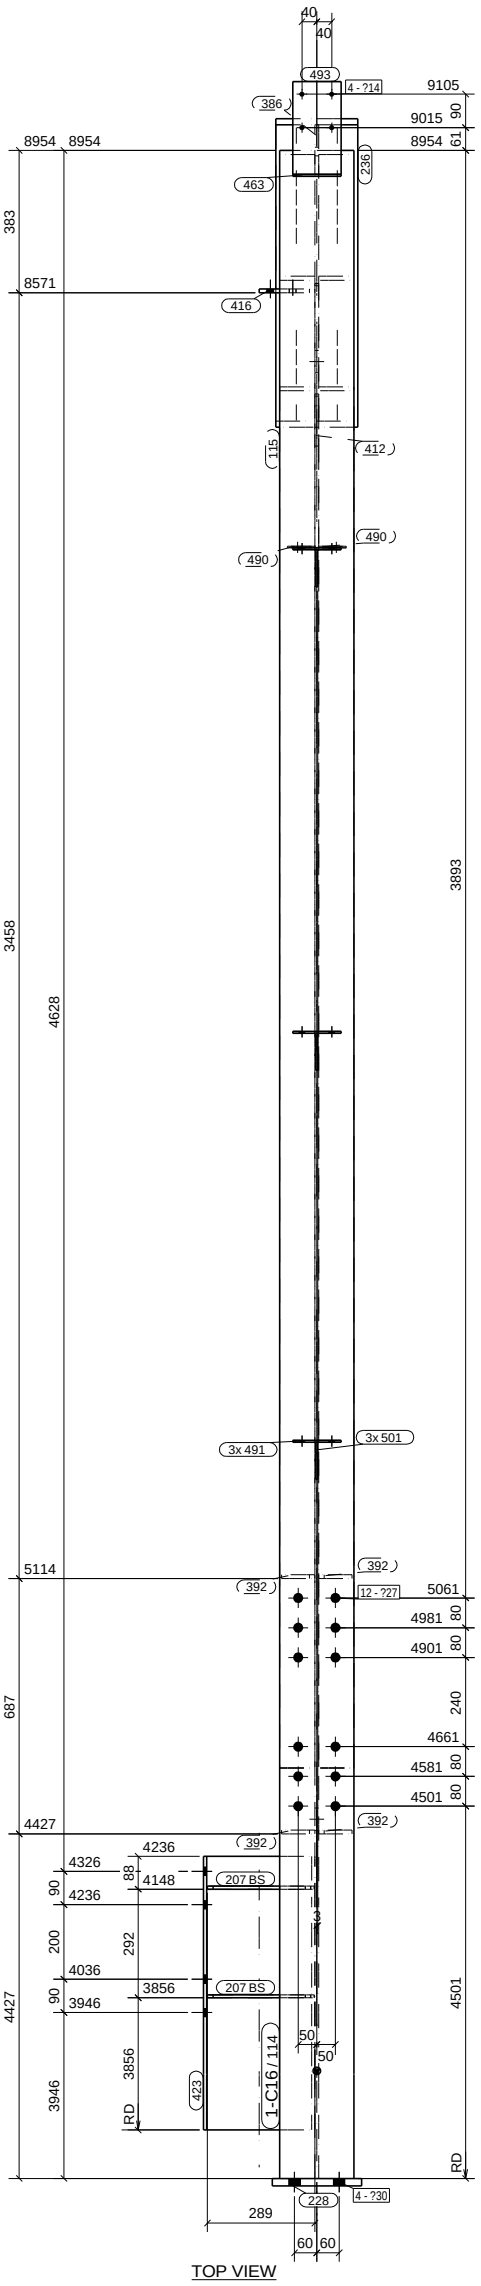

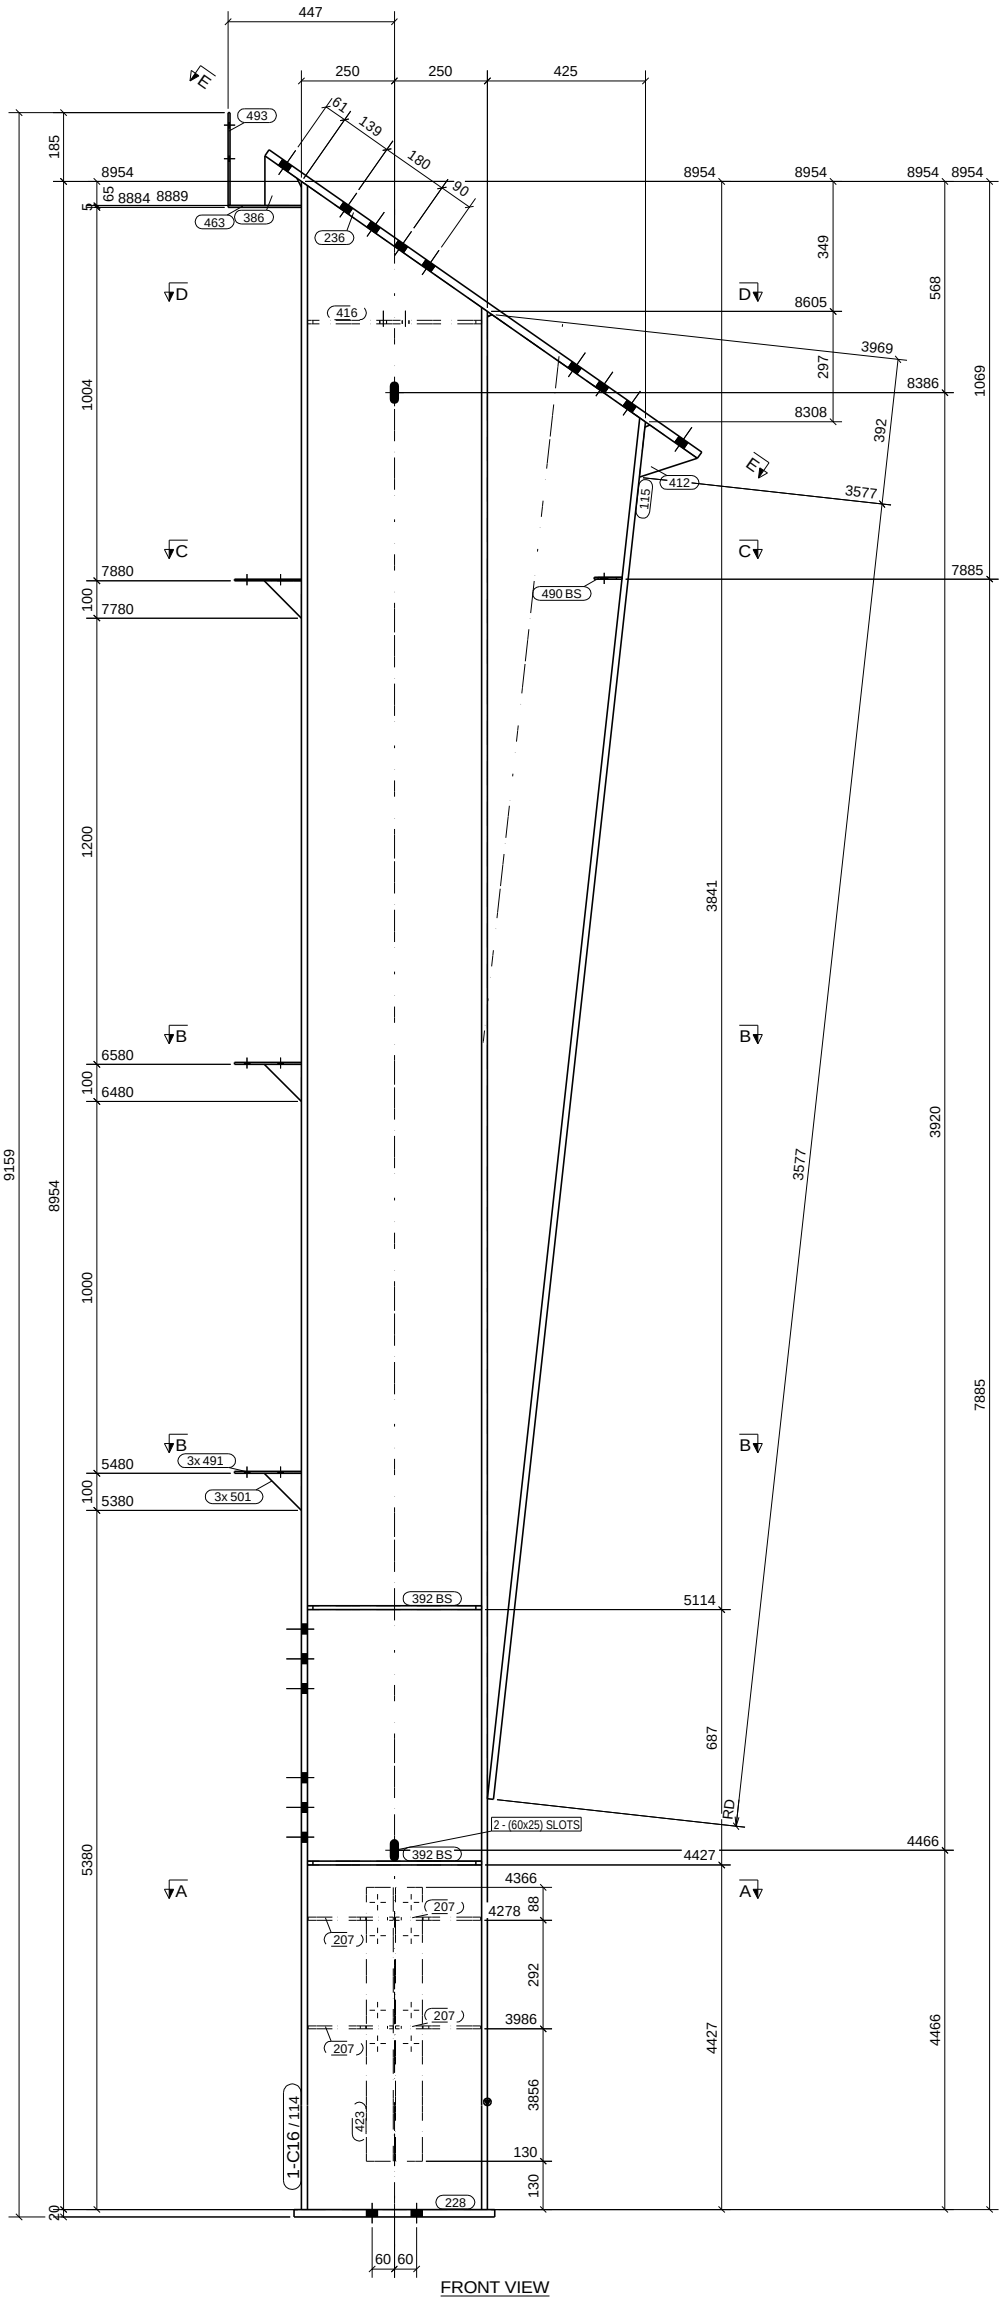


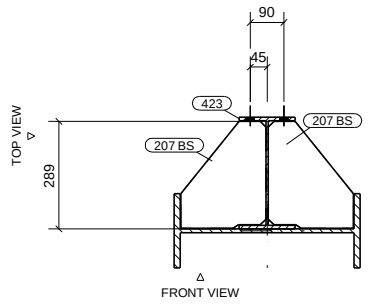


A - A

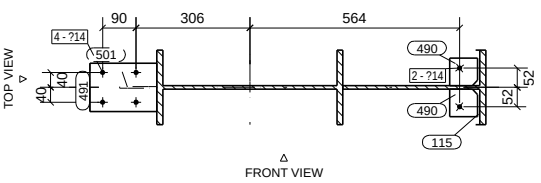

C - C

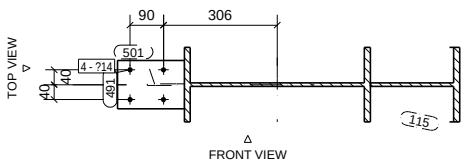

B - B

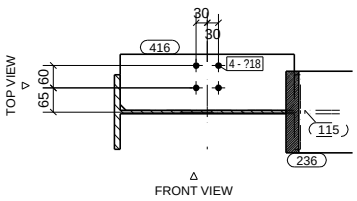

D - D

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00

MARK: 1-C16
QTY: 1
DESC.: IPE500-J

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - -

DRAWING TITLE:

COLUMN
1-C16

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

Tekla structures
/12/2026 * 15:26:36

PDF created with pdfFactory Pro trial version www.pdffactory.com