BILL OF MATERIALS		ASSEMBLY POS. 1-PU32			No. Required 1		POS. NO. 355	
POS. NO.	QTYN.	Profile	LENGTH (mm)	Material	UNIT weight kg/m	weight (kg) QTY.	TOTAL	NOTE
355	1	ZZ182-1.8-15-50	8292.0	S235JR	4.31	35.71	35.71	
Total Weight						35.7 (kg)		


BOLT, NUT & WASHERS MATERIAL LIST				
EACH	REMARK		UNIT WEIGHT KG/1000	WEIGHT (KG)
8	M12x25 BOLTS	A307	36.6	0.29
8	M12 NUTS	A307	15.9	0.13
8	M12 WASHERS	A307	5.9	0.05
2	M12x25 BOLTS	GR8.8	36.6	0.07
2	M12 NUTS	GR8.8	15.9	0.03
2	M12 WASHERS	GR8.8	5.9	0.01
8	M12x30 BOLTS	GR8.8	40.2	0.32
8	M12 NUTS	GR8.8	15.9	0.13
8	M12 WASHERS	GR8.8	5.9	0.05
Total weight				1.08 (KG)

GENERAL NOTES:

1. ALL HOLES ARE 22 mm DIA (UON).
2. ALL DIMENSIONS ARE IN MM (UON).
3. UNLESS OTHERWISE NOTED ALL FILLET WELD SIZE SHALL BE 7mm FILLET CONTINUOUS(UON)
4. RD DENOTES BASE LINE = 00



TOP VIEW

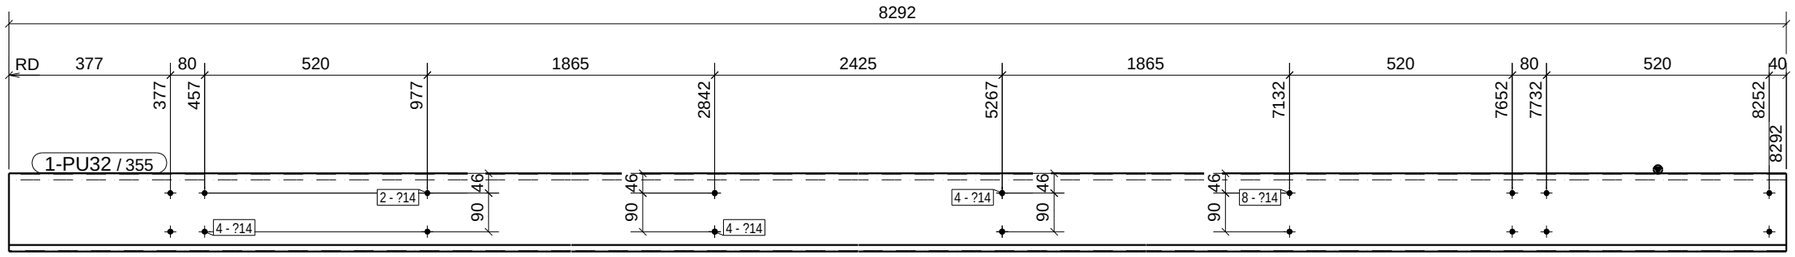

FRONT VIEW

MARK: 1-PU32
QTY: 1
DESC.: ZZ182-1.8-15-50

REV.	DATE	DESCRIPTION	DRN	CHK	DSN

PROJECT NAME:

MADAR GROUP JORDAN

CONTRACTOR:

- - - - - - - - - - - - - - - - - - -

DRAWING TITLE:

PURLIN
1-PU32

CHECKED BY	A.A	SCALE	
DATE	A.A	SHEET NO.	

Tekla structures
6/12/2026 * 15:27:51

PDF created with pdfFactory Pro trial version www.pdffactory.com